


## DISPLAYLINK · 15.6" GROW ROOM PANEL

# Your grow room, on the wall.

An always-on Growlink panel for every room. Live climate, irrigation and alerts where your team works. One Ethernet cable powers it.

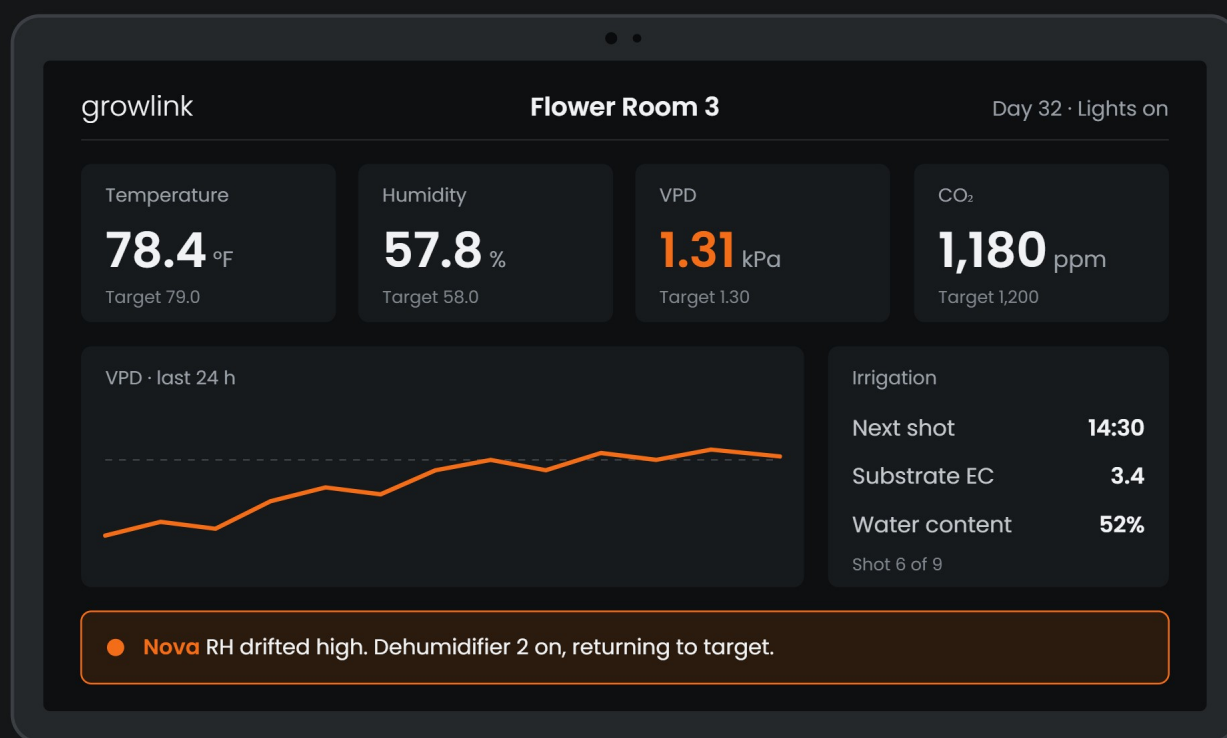

01

## Always on

Full HD, 10-point touch. Rooms, setpoints and alerts without reaching for a phone.

02

## One-cable install

Power over Ethernet. Flush wall mount with a 13.6 mm profile.

03

## Senses the room

On-board temperature, humidity and light sensing. 5 MP camera.

04

## Nova AI, on the wall

Ask Nova what changed in the room and what to do next. Answers from live Growlink data.

## DISPLAYLINK

## Specifications

## DISPLAY

|              |                     |
|--------------|---------------------|
| Size         | 15.6"               |
| Resolution   | 1920 × 1080 Full HD |
| Aspect ratio | 16:9                |
| Touch        | 10-point capacitive |

## COMPUTE

|           |                                  |
|-----------|----------------------------------|
| Processor | Rockchip [RK3566 / RK3576S]      |
| Memory    | 4 GB RAM                         |
| Storage   | [32 / 64] GB                     |
| Software  | Android · Growlink panel app     |
| AI        | Nova AI assistant, built in      |
| Apps      | Runs any Builder app full-screen |

## CONNECTIVITY

|           |                               |
|-----------|-------------------------------|
| Wi-Fi     | Wi-Fi 6 · 802.11a/b/g/n/ac/ax |
| Bluetooth | 5.3                           |
| Ethernet  | RJ45 with PoE                 |

## PHYSICAL

|             |                                                     |
|-------------|-----------------------------------------------------|
| Dimensions  | 363.25 × 225.99 × 13.6 mm<br>14.30 × 8.90 × 0.54 in |
| Total depth | 38.15 mm (1.50 in) with rear housing                |
| Mounting    | Bracket U on a vertical double-gang box             |
| Package     | 15.5 × 10.25 × 3 in<br>394 × 260 × 76 mm            |
| Ship weight | 6.5 lb (2.95 kg)                                    |

## INTERFACES

|             |                               |
|-------------|-------------------------------|
| Relay       | 1 × relay · 1 / COM / 2       |
| Digital I/O | 2 channels · GND / 1 / 2      |
| Serial      | RS-485 (A/B) · RS-232 (RX/TX) |
| IR          | External receiver port        |
| USB         | USB-C with OTG                |
| Power       | PoE or DC input               |

## SENSING AND AV

|         |                           |
|---------|---------------------------|
| Climate | Temperature and humidity  |
| Light   | Ambient light sensor      |
| Camera  | 5 MP                      |
| Audio   | 4 mics · 2 × 2 W speakers |
| Status  | RGB LED                   |

## ENVIRONMENT

|           |                                  |
|-----------|----------------------------------|
| Operating | 0–40 °C (32–104 °F)<br>20–80% RH |
| Storage   | –20–60 °C (–4–140 °F)            |

## COMPLIANCE

|          |                      |
|----------|----------------------|
| US       | FCC Part 15, Class B |
| EU       | CE · WEEE            |
| Warranty | 1 year               |

